



Verwendung



Montage

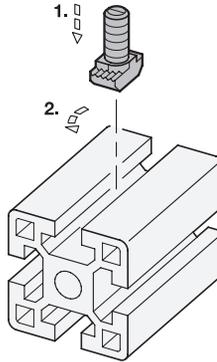

1 2 3

n	d	l ₁											b	h ₁	h ₂	l ₂
			Stahl					Edelstahl								
8	M 6	16	20	25	30	40	60	20	25	30	40	60	16	4,5	1,5	8
8	M 8	20	25	30	-	-	-	-	-	-	-	-	16	4,5	1,5	8
10	M 6	16	20	25	30	40	60	20	25	30	40	60	19,5	5,5	4	8,5
10	M 8	20	25	30	40	60	-	20	25	30	40	60	19,5	5,5	4	8,5

Ausführung

Stahl	SZ
verzinkt, blau passiviert	
Edelstahl	NB
blank	
RoHS	

Hammerkopfschrauben GN 52b befestigen Anbauteile und Zubehör in der Nut von Aluprofilen. Sie werden an beliebiger Stelle in die Nut des Aluprofils eingebracht und durch eine 90°-Drehung fixiert. Die Verbindung ist leitfähig.

Hinweise

GN 10b Aluprofile (Profiltyp leicht)	Seite
GN 10b Aluprofile (Profiltyp schwer)	QVX

Zubehör

GN 53b Bundmuttern	QVX
--------------------	-----

Bestellbeispiel

1 2 3 4
GN 52b-10 M8 30-SZ

1	n
2	d
3	l ₁
4	Werkstoff / Oberfläche